

CP-1

## Chisel Plow

The logo for BIGHAM, featuring a stylized green leaf icon to the left of the word "BIGHAM" in a bold, black, sans-serif font.

The Bigham line of Chisel Plows offers solid solutions to a variety of tough field requirements

- Breaks up soil after harvest to prevent erosion.
- Opens up the soil, breaks up clods and leaves an uneven surface to trap post-harvest moisture.
- Breaks up hard pans caused by moldboard, disc harrow, and other traffic without turning under top soil.
- Aids seedbed preparation and incorporates chemicals.



Lubbock, Texas  
Carlisle, Arkansas

(800) 692-4449  
(870) 552-7517





[www.BighamAg.com](http://www.BighamAg.com)



# Chisel Plow



- 5, 7, 9 shank models available. All based on the same frame and can be adjusted to different tractor sizes. 3x4 tubing provides strength and adaptability to tooling options provided by Bigham Ag for other applications.
- Shanks can be spaced on various measurements for use as a row crop lister or cultivator. The unique chisel shank incorporates an adjustable, full trip foot piece for impact protection.
- The foot piece allows use of chisel spikes and points, furrowing tools and cultivator sweeps. Shanks are high clearance and high flow, allowing operation in many conditions and applications.
- Gauge wheels are standard. Heavy duty steel wheel with pin adjustment allows for quick and consistent depth control. Steel wheel eliminates flats. Heavy duty hubs with tapered roller bearings for extra life.
- Chisel shank spacing is adjustable to meet the requirements of the operator. Initial spacing for a field chisel with shanks on 12" spacing. Optional chisel sweeps, chisel spikes, furrowing tools and cultivator sweeps are available to meet specific needs.
- Standard hitch is category II-III. Hitch for John Deere iMatch is available to meet specific needs.

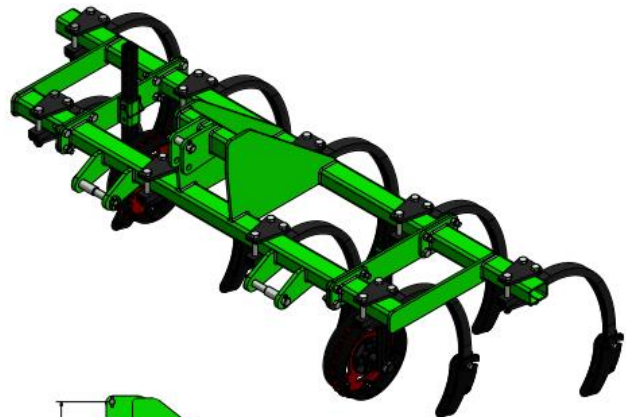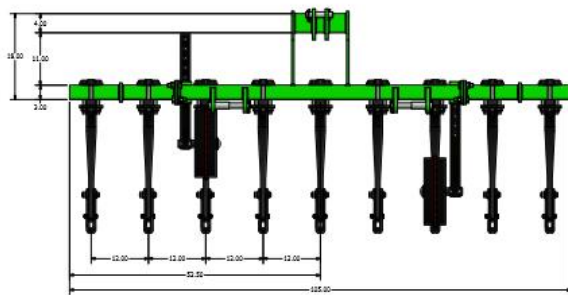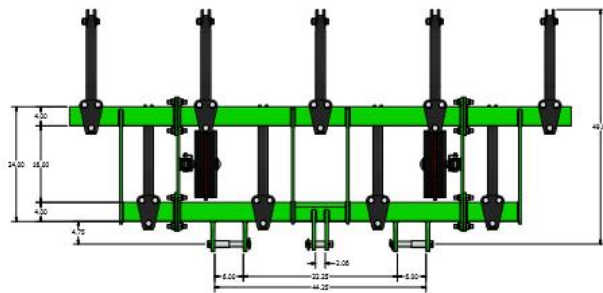

Your Bigham Representative:

